


tandwielen, rechte vertanding

pignons droits

module **2.5** (b = 20 mm)

01

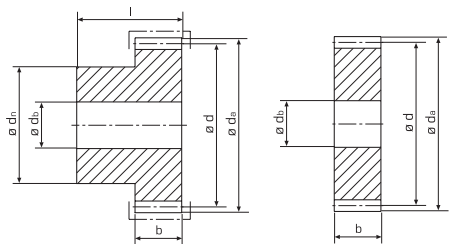

Z*	b	l	da	d	dn	db	Kg	staal acier C45 (1.0503)	inductief gehard trepé inductif C45 (1.0503)	roestvrij inoxydable 1.4305 (X8 CrNiS 18-9)
12	20	35	35,0	30,0	23	10	0,130	111-025-012	-	-
13	20	35	37,5	32,5	25	10	0,155	111-025-013	-	-
14	20	35	40,0	35,0	25	10	0,190	111-025-014	-	-
15	20	35	42,5	37,5	25	10	0,200	111-025-015	111-025-415	-
16	20	35	45,0	40,0	25	10	0,225	111-025-016	-	-
17	20	35	47,5	42,5	30	10	0,280	111-025-017	-	-
18	20	35	50,0	45,0	30	12	0,286	111-025-018	-	-
19	20	35	52,5	47,5	30	12	0,305	111-025-019	-	-
20	20	35	55,0	50,0	30	12	0,340	111-025-020	111-025-420	-
21	20	35	57,5	52,5	40	12	0,432	111-025-021	-	-
22	20	35	60,0	55,0	40	12	0,467	111-025-022	-	-
23	20	35	62,5	57,5	40	12	0,490	111-025-023	-	-
24	20	35	65,0	60,0	40	12	0,515	111-025-024	-	-
25	20	35	67,5	62,5	40	12	0,550	111-025-025	111-025-425	-
28	20	35	75,0	70,0	45	12	0,735	111-025-028	-	-
30	20	35	80,0	75,0	50	15	0,860	111-025-030	111-025-430	-
36	20	35	95,0	90,0	60	15	1,230	111-025-036	-	-
38	20	35	100,0	95,0	60	15	1,378	111-025-038	-	-
40	20	35	105,0	100,0	60	15	1,500	111-025-040	111-025-440	-
45	20	35	117,5	112,5	70	15	1,950	111-025-045	-	-
48	20	35	125,0	120,0	70	15	2,160	111-025-048	-	-
50	20	35	130,0	125,0	80	20	2,400	111-025-050	-	-
52	20	35	135,0	130,0	80	20	2,560	111-025-052	-	-
56	20	35	145,0	140,0	80	20	2,900	111-025-056	-	-
60	20	35	155,0	150,0	90	20	3,410	111-025-060	111-025-460	-
76	20	-	195,0	190,0	-	16	4,363	110-025-076	-	-
80	20	-	205,0	200,0	-	16	4,839	110-025-080	-	-
95	20	-	242,5	237,5	-	16	6,852	110-025-095	-	-
120	-	-	-	-	-	-	-	-	-	-

ingrijphoek / angle d'attaque: 20°

Z*: aantal tanden / nombre de dents

© Aandrijvingen Gallon NV 100510