


tandwielen, rechte vertanding
pignons droits
module **6.0** (b = 48 mm)

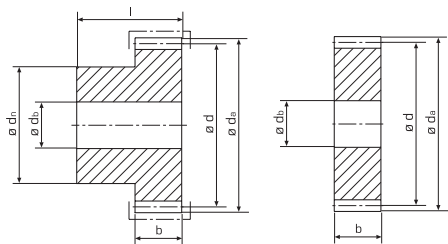

Z*	b	l	da	d	dn	db	Kg	staal acier C45 (1.0503)	inductief gehard trempé inductif C45 (1.0503)	roestvrij inoxydable 1.4305 (X8 CrNiS 18-9)
12	48	70	84,0	72,0	54	20	1,70	111-060-012	-	-
13	48	70	90,0	78,0	60	20	2,03	111-060-013	-	-
14	-	-	-	-	-	-	-	-	-	-
15	48	70	102,0	90,0	60	25	2,56	111-060-015	111-060-415	-
16	48	70	108,0	96,0	60	25	3,16	111-060-016	-	-
17	-	-	-	-	-	-	-	-	-	-
18	48	70	120,0	108,0	70	25	3,79	111-060-018	-	-
19	-	-	-	-	-	-	-	-	-	-
20	48	70	132,0	120,0	70	25	4,60	111-060-020	111-060-420	-
21	-	-	-	-	-	-	-	-	-	-
22	-	-	-	-	-	-	-	-	-	-
23	-	-	-	-	-	-	-	-	-	-
24	48	70	156,0	144,0	80	30	6,53	111-060-024	-	-
25	48	70	162,0	150,0	80	30	7,02	111-060-025	111-060-425	-
28	48	-	180,0	168,0	-	30	8,00	110-060-028	-	-
30	48	-	192,0	180,0	-	30	9,23	110-060-030	110-060-430	-
36	48	-	228,0	216,0	-	30	13,30	110-030-036	-	-
38	48	-	240,0	228,0	-	30	14,80	110-030-038	-	-
40	48	-	252,0	240,0	-	30	16,61	110-060-040	110-060-440	-
45	48	-	282,0	270,0	-	40	20,90	110-060-045	-	-
48	48	-	300,0	288,0	-	40	23,75	110-060-048	-	-
50	48	-	312,0	300,0	-	40	25,90	110-060-050	-	-
52	48	-	324,0	312,0	-	40	28,10	110-060-052	-	-
56	48	-	348,0	336,0	-	40	32,00	110-060-056	-	-
60	48	-	372,0	360,0	-	40	37,70	110-060-060	110-060-460	-
76	48	-	468,0	456,0	-	40	60,20	110-060-076	-	-
80	48	-	492,0	480,0	-	50	66,80	110-060-080	-	-
95	48	-	582,0	570,0	-	50	95,00	110-060-095	-	-
120	-	-	-	-	-	-	-	-	-	-

ingrijphoek / angle d'attaque: 20°
Z*: aantal tanden / nombre de dents