
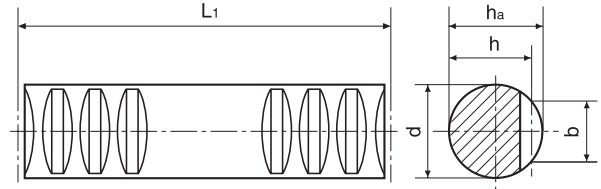


ronde tandlatten voor doorlopende montage
crémaillères rondes pour montage continu
 staal / acier: **1.0503 (C45 K) - 650 N/mm²**
 vertandingskwaliteit / *qualité denture 9*

02

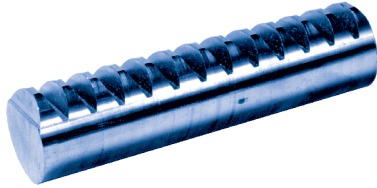

module	L1	Z*	ha	h	d h11	b	Kg	code
1,0	251,3	80	15,0	14,00	15	7,5	0,34	141-610-025
1,0	499,5	159	15,0	14,00	15	7,5	0,66	141-610-050
1,0	999,0	318	15,0	14,00	15	7,5	1,35	141-610-100
1,5	249,8	53	17,0	15,50	17	9,6	0,42	141-615-025
1,5	499,5	106	17,0	15,50	17	9,6	0,84	141-615-050
1,5	999,0	212	17,0	15,50	17	9,6	1,70	141-615-100
2,0	251,3	40	20,0	18,00	20	12,0	0,55	141-620-025
2,0	502,7	80	20,0	18,00	20	12,0	1,10	141-620-050
2,0	999,0	159	20,0	18,00	20	12,0	2,20	141-620-100
2,5	251,3	32	25,0	22,25	25	15,0	0,90	141-625-025
2,5	502,7	64	25,0	22,25	25	15,0	1,80	141-625-050
2,5	997,5	127	25,0	22,25	25	15,0	3,60	141-625-100
3,0	254,5	27	30,0	27,00	30	18,0	1,30	141-630-025
3,0	499,5	53	30,0	27,00	30	18,0	2,50	141-630-050
3,0	999,0	106	25,0	27,00	25	15,0	5,10	141-630-100
4,0	251,3	20	40,0	36,00	40	24,0	2,30	141-640-025
4,0	502,6	40	40,0	36,00	40	24,0	4,50	141-640-050
4,0	1005,3	80	40,0	36,00	40	24,0	9,10	141-640-100
5,0	251,3	16	50,0	45,00	50	30,0	3,80	141-650-025
5,0	502,6	36	50,0	45,00	50	30,0	7,10	141-650-050
5,0	1005,3	64	50,0	45,00	50	30,0	14,30	141-650-100

ingrijphoek / *angle d'attaque*: 20°

Z*: aantal tanden / *nombre de dents*

pitch - (8e27)

module	pitch	l	Z*	ha	h	d h11	b	Kg	code
1,591	5 mm	500	100	14,80	13,21	15	9,6	0,85	141-616-050
1,591	5 mm	1000	200	14,80	13,21	15	9,6	1,70	141-616-100
3,183	10 mm	500	50	29,70	26,52	30	18,0	2,50	141-631-050
3,183	10 mm	1000	100	29,70	26,52	30	18,0	5,10	141-631-100

Z*: aantal tanden / *nombre de dents*