


aanlasnaven voor klembussen Taperlock®
moyeux à souder pour moyeux amovibles Taperlock®

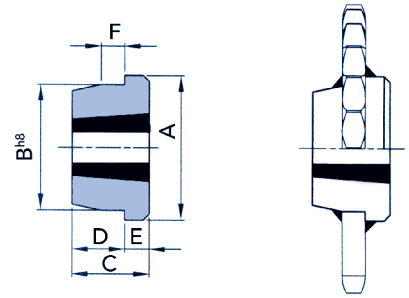

05

type	klembus moyeu	boring alésage	A	B	C	D	E	F	Kg
MSC	1210	11..32	73	60	25	16	9	10	0,31
MSC	1215	14..32	73	60	38	22	16	11	0,50
MSC	1610	12..42	83	70	25	16	9	10	0,37
MSC	1615	14..42	83	70	38	22	16	11	0,60
MSC	2012	15..50	96	90	32	22	10	12	0,72
MSC	2517	19..65	127	110	45	26	19	13	1,80
MSC	3020	25..75	152	130	51	27	24	18	2,59
MSC	3030	35..75	151	130	76	51	25	19	3,55
MSC	3525	35..90	184	155	65	40	25	25	7,30
MSC	3535	35..90	184	155	89	57	32	25	6,40
MSC	4040	45..100	225	195	102	70	32	35	13,22
MSC	4545	55..110	254	220	114	76	38	40	19,30
MSC	5050	70..125	276	242	127	89	38	40	24,52