


tandriemschijven voor klembussen H
poulies dentées à moyeu amovible type H
H 300 stap / pas 1/2" (12,7 mm)
76,2 mm riembreedte / largeur

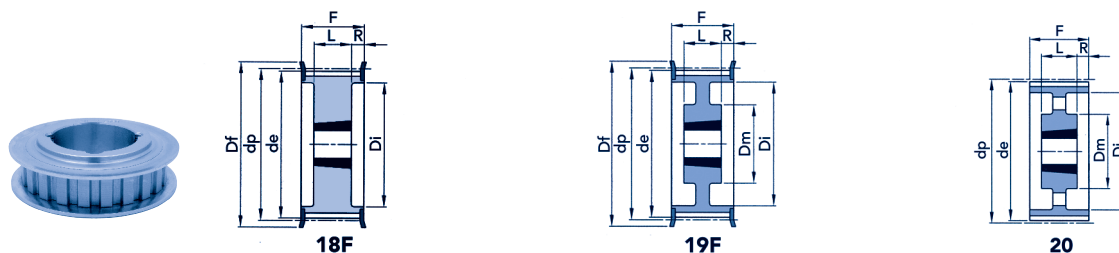

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 20 H 300	18F	20	1615	42	80,85	79,48	87	-	64,5	84,0	38,0	23,0	315	1,22
TL 21 H 300	18F	21	1615	42	84,89	83,52	91	-	65,0	84,0	38,0	23,0	316	1,52
TL 22 H 300	18F	22	1615	42	88,94	87,56	93	-	67,0	84,0	38,0	23,0	317	1,80
TL 23 H 300	18F	23	1615	42	92,98	91,61	97	-	70,0	84,0	38,0	23,0	318	2,04
TL 24 H 300	18F	24	1615	42	97,02	95,65	103	-	73,5	84,0	38,0	23,0	320	2,29
TL 25 H 300	18F	25	1615	42	101,06	99,69	106	-	77,0	84,0	38,0	23,0	321	2,54
TL 26 H 300	18F	26	1615	42	105,11	103,73	111	-	82,0	84,0	38,0	23,0	322	2,73
TL 27 H 300	18F	27	2012	50	109,15	107,78	115	-	85,0	84,0	32,0	26,0	323	2,54
TL 28 H 300	18F	28	2012	50	113,19	111,82	119	-	90,5	84,0	32,0	26,0	325	2,68
TL 30 H 300	18F	30	2012	50	121,28	119,90	127	-	98,0	84,0	32,0	26,0	327	3,21
TL 32 H 300	18F	32	2517	60	129,36	127,99	135	-	106	84,0	45,0	19,5	328	3,58
TL 36 H 300	18F	36	2517	60	145,53	144,16	152	-	121	84,0	45,0	19,5	334	4,99
TL 40 H 300	18F	40	2517	60	161,70	160,33	168	-	138	84,0	45,0	19,5	338	6,50
TL 44 H 300	19F	44	2517	60	177,87	176,50	184	119	152	86,0	45,0	20,5	339	7,55
TL 48 H 300	19F	48	2517	60	194,04	192,67	200	119	169	86,0	45,0	20,5	342	8,66

materiaal: staal / matériau: acier

TL 60 H 300	20	60	2517	60	242,55	241,18	-	119	223	86,0	45,0	20,5	-	7,42
TL 72 H 300	20	72	2517	60	291,06	289,69	-	119	270	86,0	45,0	20,5	-	9,33
TL 84 H 300	20	84	2517	60	339,57	338,20	-	119	320	86,0	45,0	20,5	-	11,19
TL 96 H 300	20	96	3030	75	388,08	386,71	-	150	362	86,0	76,0	5,0	-	17,96
TL120H 300	20	120	3030	75	485,10	483,73	-	150	460	86,0	76,0	5,0	-	22,23

materiaal: gietijzer / matériau: fonte

Z*: aantal tanden / nombre de dents