


tandriemschijven voor klembussen 5M
poulies dentées à moyeu amovible type 5M
5M 15 stap / *pas* 5 mm
15 mm riembreedte / *largeur*

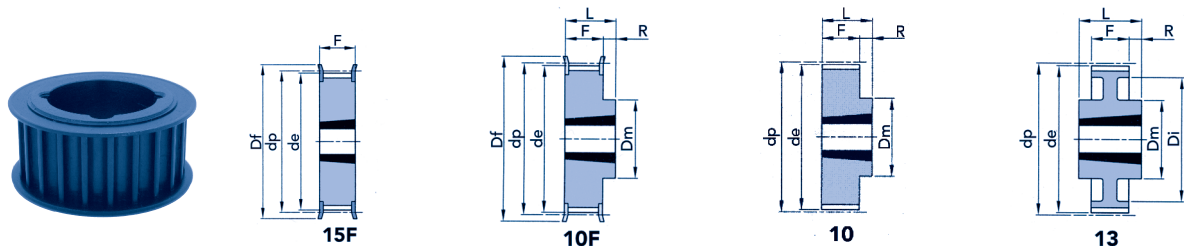

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 34-5M-15	15F	34	1108	25	54,11	52,97	57	-	-	22	22	-	213	0,20
TL 36-5M-15	15F	36	1108	25	57,30	56,15	60	-	-	22	22	-	214	0,25
TL 38-5M-15	15F	38	1108	25	60,48	59,34	66	-	-	22	22	-	216	0,30
TL 40-5M-15	15F	40	1108	25	63,66	62,52	71	-	-	22	22	-	217	0,35
TL 44-5M-15	15F	44	1108	25	70,03	68,89	75	-	-	22	22	-	218	0,40
TL 48-5M-15	10F	48	1210	32	76,39	75,25	83	59	-	22	25	3	219	0,46
TL 56-5M-15	10F	56	1210	32	89,13	87,99	93	70	-	22	25	3	222	0,60
TL 64-5M-15	10F	64	1210	32	101,86	100,72	106	80	-	22	25	3	224	0,80
TL 72-5M-15	10	72	1610	42	114,59	113,45	-	92	-	22	25	3	-	1,20
TL 80-5M-15	10	80	1610	42	127,32	126,18	-	92	-	22	25	3	-	1,76
TL 90-5M-15	10	90	1610	42	143,24	142,10	-	92	-	22	32	3	-	2,32
TL112-5M-15	10	112	2012	50	178,25	177,11	-	110	-	20	32	12	-	3,72
TL136-5M-15	13	136	2012	50	216,45	215,31	-	110	199	20	32	6	-	3,82

materiaal: staal / *matériau: acier*

Z*: aantal tanden / *nombre de dents*