


tandriemschijven voor klembussen 8M
poulies dentées à moyeu amovible type 8M
8M 50 stap / *pas* 8 mm
50 mm riembreedte / *largeur*

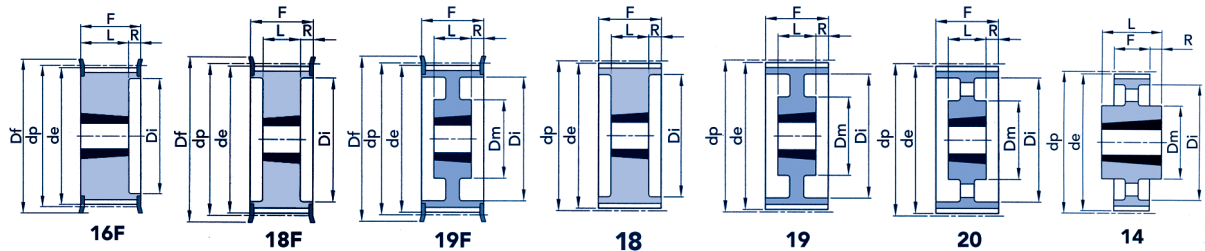

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 28-8M-50	16F	28	1210	32	71,30	70,08	75	-	50	60	25	35	312	0,60
TL 30-8M-50	16F	30	1615	42	76,39	75,13	83	-	58	60	38	22	314	0,65
TL 32-8M-50	16F	32	1615	42	81,49	80,16	87	-	63	60	38	22	315	0,80
TL 34-8M-50	16F	34	1615	42	86,58	85,21	91	-	65	60	38	22	316	1,08
TL 36-8M-50	16F	36	1615	42	91,67	90,30	98	-	68	60	38	22	319	1,35
TL 38-8M-50	16F	38	1615	42	96,77	95,39	103	-	72	60	38	22	320	1,65
TL 40-8M-50	18F	40	2012	50	101,86	100,49	106	-	80	60	32	14	321	1,70
TL 44-8M-50	18F	44	2012	50	112,05	110,67	119	-	86	60	32	14	325	1,80
TL 48-8M-50	18F	48	2012	50	122,23	120,86	127	-	95	60	32	14	327	2,35
TL 56-8M-50	18F	56	2517	60	142,60	141,23	148	-	116	60	45	7,5	333	3,35
TL 64-8M-50	18F	64	2517	60	162,97	161,60	168	-	136	60	45	7,5	338	4,90
TL 72-8M-50	19F	72	2517	60	183,35	181,97	192	125	158	60	45	7,5	340	6,90

materiaal: staal / *matériau: acier*

TL 80-8M-50	18	80	3020	75	203,72	202,35	-	-	180	60	51	4,5	-	8,90
TL 90-8M-50	19	90	3020	75	229,18	227,81	-	160	204	60	51	4,5	-	9,90
TL 112-8M-50	19	112	3020	75	285,21	283,83	-	170	254	60	51	4,5	-	12,10
TL 144-8M-50	20	144	3020	75	366,69	365,32	-	170	336	60	51	4,5	-	15,40
TL 168-8M-50	14	168	3525	90	427,81	426,44	-	198	395	60	65	2,5	-	22,80
TL 192-8M-50	14	192	3525	90	488,92	487,55	-	198	455	60	65	2,5	-	26,50

materiaal: gietijzer / *matériau: fonte*

Z*: aantal tanden / *nombre de dents*