


tandriemschijven voor klembussen 8M
poulies dentées à moyeu amovible type 8M
8M 85 stap / pas 8 mm
85 mm riembreedte / largeur

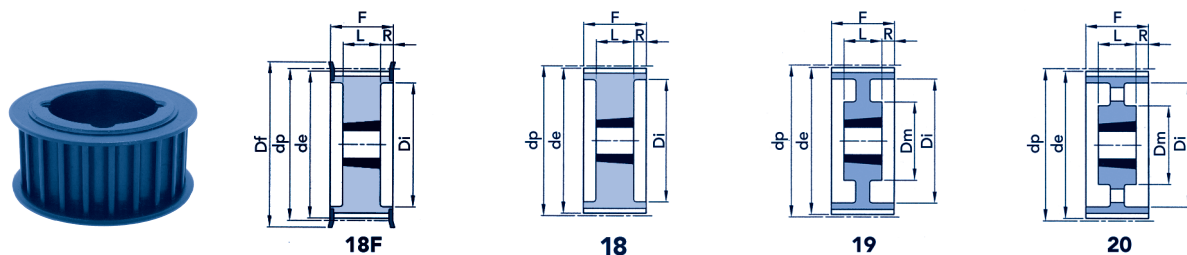

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 34-8M-85	18F	34	1615	42	86,58	85,22	91	-	65	95	38	28,5	316	1,50
TL 36-8M-85	18F	36	1615	42	91,67	90,30	98	-	68	95	38	28,5	319	1,90
TL 38-8M-85	18F	38	1615	42	96,77	95,39	103	-	72	95	38	28,5	320	2,20
TL 40-8M-85	18F	40	2012	50	101,86	100,49	106	-	80	95	32	31,5	321	1,90
TL 44-8M-85	18F	44	2012	50	112,05	110,67	119	-	86	95	32	31,5	325	2,30
TL 48-8M-85	18F	48	2517	60	122,23	120,86	127	-	97	95	45	25	327	2,70
TL 56-8M-85	18F	56	2517	60	142,60	141,23	148	-	116	95	45	25	333	4,50
TL 64-8M-85	18F	64	2517	60	162,97	161,60	168	-	136	95	45	25	338	6,30
TL 72-8M-85	18F	72	3020	75	183,35	181,97	192	-	150	95	51	22	340	8,10

materiaal: staal / matériau: acier

TL 80-8M-85	18	80	3020	75	203,72	202,35	-	-	180	95	51	22	-	10,20
TL 90-8M-85	19	90	3020	75	229,18	227,81	-	170	204	95	51	22	-	11,20
TL 112-8M-85	19	112	3020	75	285,21	283,83	-	170	254	95	51	22	-	15,00
°TL 144-8M-85	20	144	3525	90	366,69	365,32	-	198	336	95	65	15	-	20,20
°TL 168-8M-85	20	168	3525	90	427,81	426,44	-	198	395	95	65	15	-	22,40
°TL 192-8M-85	20	192	3525	90	488,92	487,55	-	198	455	95	65	15	-	28,20

materiaal: gietijzer / matériau: fonte

°enkel op aanvraag / °sur demande uniquement

Z*: aantal tanden / nombre de dents