


tandriemschijven voor klembussen 14M
poulies dentées à moyeu amovible type 14M
14M 55 stap / pas 14 mm
55 mm riembreedte / largeur

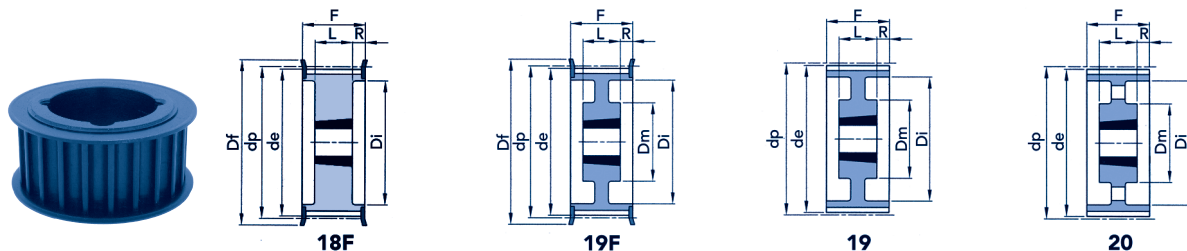

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 28-14M-55	18F	28	2012	50	124,78	122,12	127	-	94	70	32	19	400	2,20
TL 30-14M-55	18F	30	2517	60	133,69	130,99	138	-	100	70	45	12,5	401	2,70
TL 32-14M-55	18F	32	2517	60	142,60	139,88	154	-	108	70	45	12,5	403	3,60
TL 34-14M-55	18F	34	2517	60	151,52	148,79	160	-	110	70	45	12,5	404	4,50
TL 36-14M-55	18F	36	2517	60	160,43	157,68	168	-	120	70	45	12,5	405	5,20
TL 38-14M-55	18F	38	2517	60	169,34	166,60	183	-	130	70	45	12,5	406	6,20
TL 40-14M-55	18F	40	2517	60	178,25	175,49	188	-	138	70	45	12,5	407	6,90
TL 44-14M-55	18F	44	3020	75	196,08	193,28	211	-	155	70	51	9,5	411	8,60
TL 48-14M-55	18F	48	3020	75	213,90	211,11	226	-	170	70	51	9,5	412	10,50

materiaal: staal / matériau: acier

TL 56-14M-55	18F	56	3020	75	249,55	246,76	256	170	208	70	51	9,5	416	13,50
TL 64-14M-55	19F	64	3020	75	285,21	282,41	296	170	240	70	51	9,5	418	14,50
TL 72-14M-55	19	72	3020	75	320,86	318,06	-	170	280	70	51	9,5	-	16,30
TL 80-14M-55	20	80	3020	75	356,51	353,71	-	170	315	70	51	9,5	-	17,50
TL 90-14M-55	20	90	3020	75	401,07	398,28	-	170	360	70	51	9,5	-	20,00
TL 112-14M-55	20	112	3020	75	499,11	496,32	-	170	457	70	51	9,5	-	28,20
TL 144-14M-55	20	144	3020	75	641,71	638,92	-	170	600	70	51	9,5	-	36,00
TL 168-14M-55	20	168	3020	75	748,66	745,87	-	170	706	70	51	9,5	-	48,50
TL 192-14M-55	20	192	3020	75	855,62	852,82	-	170	813	70	51	9,5	-	52,00

materiaal: gietijzer / matériau: fonte

Z*: aantal tanden / nombre de dents