


afmetingen

dimensions

SHG-5-A -> SHG-100-A

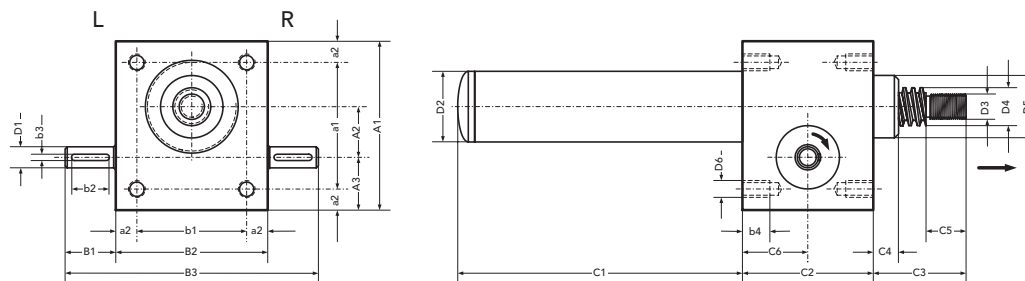

uitvoering modèle	SHG 5	SHG 10	SHG 25	SHG 50	SHG 100
max. trekkracht charge dynamique	5000 N	10 000 N	25 000 N	50 000 N	100 000 N
A1	80	100	130	180	200
A2	25	32	45	63	71
A3	24	28	31	39	46
a1	60	78	106	150	166
a2	10	11	12	15	17
B1	24	27,5	45	47,5	67,5
B2	72	85	105	145	165
B3	120	140	195	240	300
b1	52	63	81	115	131
b2	18	20	36	36	56
b3 P ⁹	3	5	5	6	8
b4	13	15	15	16	30
X + C₁	20	30	30	45	55
C2	62	75	82	117	160
C3	35	45	50	65	95
C4	12	18	23	32	40
C5	19	20	22	29	48
C6	31	37,5	41	59	81
D1 k ⁶	10	14	16	20	25
D2	34	42	50	65	90
D3	M 12	M 14	M 20	M 30	M 36
D4	Tr 18 x 4	Tr 20 x 4	Tr 30 x 6	Tr 40 x 7	Tr 55 x 9
D5 Ø	30	38	46	60	85
D6	M 8	M 8	M 10	M 12	M 20

linker „L“- en rechter „R“-kant enkel bij motoraanbouw van betekenis.
côté gauche „L“ et côté droit „R“ uniquement d'application avec moteur.

afmetingen in mm

dimensions en mm

X: lift

X: élévation