




hoekkasten, versterkte uitvoering
renvois d'angle, exécution renforcé
 dubbele ingang, doorlopende uitgang
entrée double, arbre de sortie ininterrompu

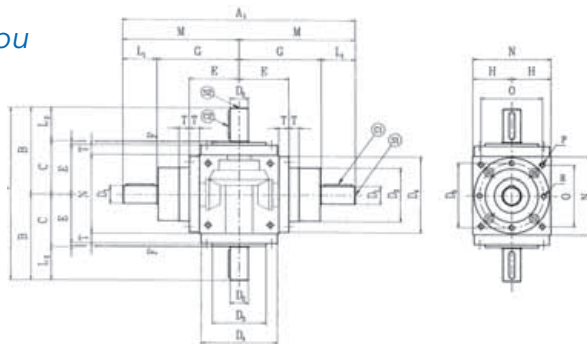

reductie / réduction 1:1 (201), 2:1 (202), 3:1 (203)

D1/D2	D3	D4	D5	A1	A2	B	C	E	F
12	44	-	54	200	144	72	46	42	2
12	44	-	54	200	144	72	46	42	2
12	44	-	54	200	144	72	46	42	2
19	60	86	72	280	210	105	65	59	4
19	60	86	72	280	210	105	65	59	4
19	60	86	72	280	210	105	65	59	4
24	70	105	88	330	260	130	80	73	5
24	70	105	88	330	260	130	80	73	5
24	70	105	88	330	260	130	80	73	5
32	95	135	115	410	310	155	95	88	5
32	95	135	115	410	310	155	95	88	5
32	95	135	115	410	310	155	95	88	5
38	120	165	145	480	360	180	110	103	5
38	120	165	145	480	360	180	110	103	5
38	120	165	145	480	360	180	110	103	5
42	135	190	165	550	410	205	125	118	5
42	135	190	165	550	410	205	125	118	5
42	135	190	165	550	410	205	125	118	5
55	170	230	205	710	520	260	150	143	5
55	170	230	205	710	520	260	150	143	5
55	170	230	205	710	520	260	150	143	5

© Aandrijvingen Gallon NV 100510

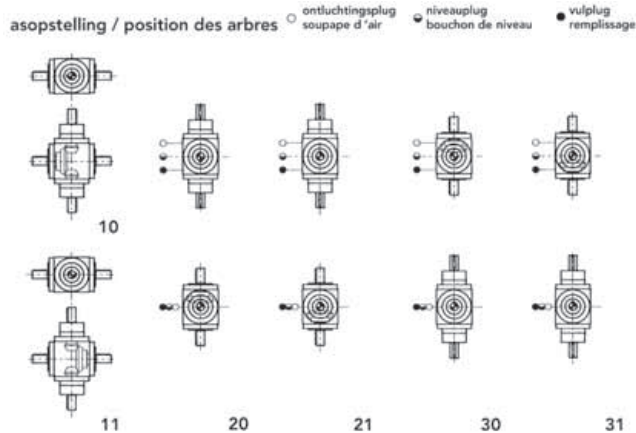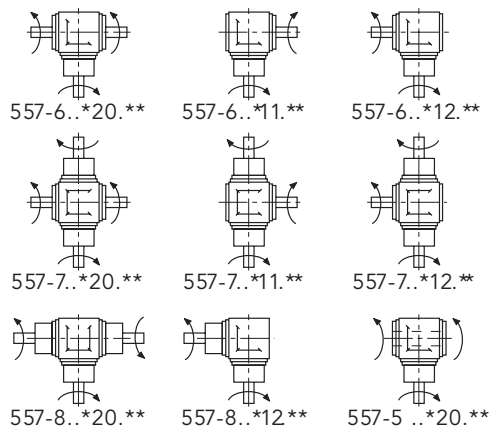

G	H	L1	L2	M	N	O	spoed / pas	T	code
74	32,5	26	26	100	65	45	M6	-	557-712-201
74	32,5	26	26	100	65	45	M6	-	557-712-202
74	32,5	26	26	100	65	45	M6	-	557-712-203
100	45	40	40	140	90	70	M6	14	557-719-201
100	45	40	40	140	90	70	M6	14	557-719-202
100	45	40	40	140	90	70	M6	14	557-719-203
115	55	50	50	165	110	88	M8	18	557-724-201
115	55	50	50	165	110	88	M8	18	557-724-202
115	55	50	50	165	110	88	M8	18	557-724-203
145	70	60	60	205	140	110	M10	18	557-732-201
145	70	60	60	205	140	110	M10	18	557-732-202
145	70	60	60	205	140	110	M10	18	557-732-203
170	85	70	70	240	170	136	M12	18	557-738-201
170	85	70	70	240	170	136	M12	18	557-738-201
170	85	70	70	240	170	136	M12	18	557-738-201
195	100	80	80	275	200	155	M12	18	557-742-201
195	100	80	80	275	200	155	M12	18	557-742-202
195	100	80	80	275	200	155	M12	18	557-742-203
245	120	110	110	355	240	190	M14	23	557-755-201
245	120	110	110	355	240	190	M14	23	557-755-202
245	120	110	110	355	240	190	M14	23	557-755-203