


conische tandwielen
pignons coniques
 staal / acier: EN8 (C45)
1 : 2,5

03

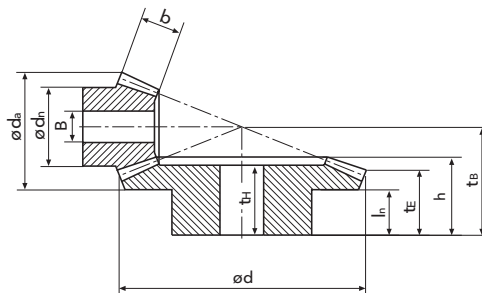

module	Z*	da	d	b	I _n	d _n	B	t _B	h	t _H	t _E	Kg	code
1,0	16	17,86	16,0	6,0	7,5	13,5	5,0	28,0	13,8	13,0	8,37	0,013	151-410-016
	40	40,74	40,0	6,0	9,0	25,0	8,0	21,0	15,9	14,0	13,93	0,075	151-410-040
1,5	16	26,79	24,0	9,0	11,2	20,0	8,0	42,0	20,7	19,5	12,56	0,041	151-415-016
	40	61,11	60,0	9,0	13,5	38,0	12,0	30,0	22,3	20,0	19,39	0,232	151-415-040
2,0	16	35,71	32,0	13,5	14,0	26,0	12,0	55,0	28,0	26,0	15,74	0,091	151-420-016
	40	81,48	80,0	13,5	18,0	50,0	18,0	39,0	29,2	26,0	24,85	0,515	151-420-040
2,5	16	44,64	40,0	17,0	15,5	32,0	14,0	67,0	33,4	32,0	17,93	0,174	151-425-016
	40	101,85	100,0	17,0	20,0	60,0	20,0	46,0	33,9	30,0	28,32	0,930	151-425-040
3,0	16	53,56	48,0	20,0	17,5	40,0	16,0	79,0	38,3	36,0	20,11	0,305	151-430-016
	40	122,22	120,0	20,0	23,0	70,0	22,0	55,0	40,3	36,0	33,78	1,630	151-430-040
3,5	16	62,49	56,0	23,5	19,0	45,0	18,0	91,0	43,6	41,0	22,30	0,470	151-435-016
	40	142,59	140,0	23,5	26,0	80,0	25,0	62,0	44,7	40,0	37,25	2,370	151-435-040
4,0	16	71,42	64,0	27,0	21,5	52,0	20,0	104,0	50,0	47,0	25,48	0,720	151-440-016
	40	162,97	160,0	27,0	30,0	90,0	30,0	72,0	52,5	46,0	43,71	3,560	151-440-040
4,5	16	80,35	72,0	30,0	23,5	60,0	22,0	116,0	54,9	52,0	27,67	1,040	151-445-016
	40	183,34	180,0	30,0	34,0	100,0	35,0	81,0	59,0	52,0	49,18	4,980	151-445-040
5,0	16	89,28	80,0	33,0	26,0	65,0	25,0	129,0	60,8	58,0	30,86	1,370	151-450-016
	40	203,71	200,0	33,0	36,0	110,0	40,0	88,0	63,4	56,0	52,64	6,600	151-450-040
6,0	16	107,16	96,0	36,5	26,8	80,0	25,0	150,0	65,5	62,0	32,23	2,480	151-460-016
	40	244,44	240,0	36,5	34,0	125,0	40,0	95,0	64,5	55,0	52,57	12,350	151-460-040

onder hoek van / angle des axes: 90°

drukhoek / angle d'attaque: 20°

Z*: aantal tanden / nombre de dents

© Aandrijvingen Gallon NV 100510