
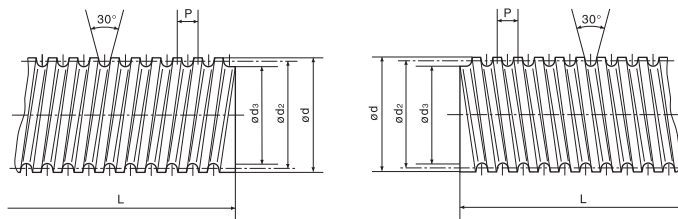


trapezium draadstangen
vis à filet trapézoïdal
gerold / enroulé





DIN 103 - kwaliteit / qualité 7e - staal / acier EN8 (C35)

Tr						links / à gauche	rechts / à droite
d x p	d2 min	d2 max	d3 min	L	Kg	ordernr. n° de comm.	ordernr. n° de comm.
12 x 3	10,191	10,415	7,8	1000	0,75	505-012-010	500-012-010
12 x 3	10,191	10,415	7,8	2000	1,50	505-012-020	500-012-020
12 x 3	10,191	10,415	7,8	3000	2,25	505-012-030	500-012-030
14 x 3	12,191	12,415	9,8	1000	1,04	505-014-010	500-014-010
14 x 3	12,191	12,415	9,8	2000	2,08	505-014-020	500-014-020
14 x 3	12,191	12,415	9,8	3000	3,12	505-014-030	500-014-030
16 x 4	13,640	13,905	10,8	1000	1,20	505-016-010	500-016-010
16 x 4	13,640	13,905	10,8	2000	2,40	505-016-020	500-016-020
16 x 4	13,640	13,905	10,8	3000	3,60	505-016-030	500-016-030
18 x 4	15,640	15,905	12,8	1000	1,58	505-018-010	500-018-010
18 x 4	15,640	15,905	12,8	2000	3,16	505-018-020	500-018-020
18 x 4	15,640	15,905	12,8	3000	4,74	505-018-030	500-018-030
20 x 4	17,640	17,905	14,8	1000	2,00	505-020-010	500-020-010
20 x 4	17,640	17,905	14,8	2000	4,00	505-020-020	500-020-020
20 x 4	17,640	17,905	14,8	3000	6,00	505-020-030	500-020-030
22 x 5	19,114	19,394	15,5	1000	2,23	505-022-010	500-022-010
22 x 5	19,114	19,394	15,5	2000	4,46	505-022-020	500-022-020
22 x 5	19,114	19,394	15,5	3000	6,69	505-022-030	500-022-030
24 x 5	21,094	21,394	17,5	1000	2,70	505-024-010	500-024-010
24 x 5	21,094	21,394	17,5	2000	5,40	505-024-020	500-024-020
24 x 5	21,094	21,394	17,5	3000	8,10	505-024-030	500-024-030
26 x 5	23,094	23,394	19,5	1000	3,26	505-026-010	500-026-010
26 x 5	23,094	23,394	19,5	2000	6,52	505-026-020	500-026-020
26 x 5	23,094	23,394	19,5	3000	9,78	505-026-030	500-026-030
28 x 5	25,094	25,394	21,5	1000	3,85	505-028-010	500-028-010
28 x 5	25,094	25,394	21,5	2000	7,70	505-028-020	500-028-020
28 x 5	25,094	25,394	21,5	3000	11,55	505-028-030	500-028-030
30 x 6	26,547	26,882	21,9	1000	4,50	505-030-010	500-030-010
30 x 6	26,547	26,882	21,9	2000	9,00	505-030-020	500-030-020
30 x 6	26,547	26,882	21,9	3000	13,50	505-030-030	500-030-030

© Aandrijvingen Gallon NV 100510

0,1/300 mm tolerantie op de spoed / tolérance sur le pas
0,3/300 mm rechtheid / tolérance rectitude

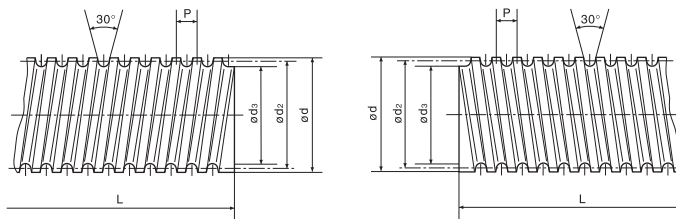

DIN 103 - kwaliteit / qualité 7e - staal / acier EN8 (C35)

Tr						links / à gauche	rechts / à droite
d x p	d2 min	d2 max	d3 min	L	Kg	ordnrr. n° de comm.	ordnrr. n° de comm.
32 x 6	28,547	28,882	23,9	1000	5,18	505-032-010	500-032-010
32 x 6	28,547	28,882	23,9	2000	10,36	505-032-020	500-032-020
32 x 6	28,547	28,882	23,9	3000	15,54	505-032-030	500-032-030
36 x 6	32,547	32,882	27,9	1000	6,70	505-036-010	500-036-010
36 x 6	32,547	32,882	27,9	2000	13,40	505-036-020	500-036-020
36 x 6	32,547	32,882	27,9	3000	20,10	505-036-030	500-036-030
40 x 7	36,020	36,375	30,5	1000	8,00	505-040-010	500-040-010
40 x 7	36,020	36,375	30,5	2000	16,00	505-040-020	500-040-020
40 x 7	36,020	36,375	30,5	3000	24,00	505-040-030	500-040-030
44 x 7	40,020	40,375	34,5	1000	9,87	505-044-010	500-044-010
44 x 7	40,020	40,375	34,5	2000	19,74	505-044-020	500-044-020
44 x 7	40,020	40,375	34,5	3000	29,61	505-044-030	500-044-030
48 x 8	43,468	43,868	37,8	1000	11,95	505-048-010	500-048-010
48 x 8	43,468	43,868	37,8	2000	23,90	505-048-020	500-048-020
48 x 8	43,468	43,868	37,8	3000	35,85	505-048-030	500-048-030
50 x 8	45,468	45,868	39,3	1000	13,00	505-050-010	500-050-010
50 x 8	45,468	45,868	39,3	2000	26,00	505-050-020	500-050-020
50 x 8	45,468	45,868	39,3	3000	39,00	505-050-030	500-050-030
60 x 9	54,935	55,360	48,1	1000	18,00	505-060-010	500-060-010
60 x 9	54,935	55,360	48,1	2000	36,00	505-060-020	500-060-020
60 x 9	54,935	55,360	48,1	3000	54,00	505-060-030	500-060-030