

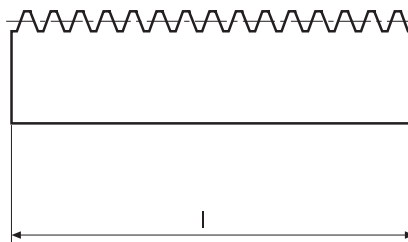


tandlatten
crémaillères

staal / acier: **1.0503 (C45) - 650 N/mm²**

vertandingskwaliteit / qualité denture **9**

02

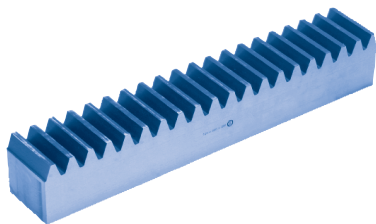



module	l	h _a	h	b h 11	Kg	code
1,0	250	9,8 ± 0,10	8,80	10	0,17	140-010-002
1,0	500	9,8 ± 0,10	8,80	10	0,34	140-010-005
1,0	1000	9,8 ± 0,15	8,80	10	0,68	140-010-010
1,5	250	14,8 ± 0,10	13,30	15	0,39	140-015-002
1,5	500	14,8 ± 0,10	13,30	15	0,78	140-015-005
1,5	1000	14,8 ± 0,15	13,30	15	1,55	140-015-010
1,5	2000	14,8 ± 0,15	13,30	15	3,10	140-015-020
2,0	500	19,75 ± 0,10	17,75	20	1,40	140-020-005
2,0	1000	19,75 ± 0,15	17,75	20	2,80	140-020-010
2,0	2000	19,75 ± 0,25	17,75	20	5,60	140-020-020
2,0	3000	19,75 ± 0,25	17,75	20	8,40	140-020-030
2,5	500	24,75 ± 0,10	22,25	25	2,10	140-025-005
2,5	1000	24,75 ± 0,15	22,25	25	4,20	140-025-010
2,5	2000	24,75 ± 0,25	22,25	25	8,40	140-025-020
2,5	3000	24,75 ± 0,25	22,25	25	12,60	140-025-030
3,0	500	29,75 ± 0,10	26,75	30	3,10	140-030-005
3,0	1000	29,75 ± 0,20	26,75	30	6,20	140-030-010
3,0	2000	29,75 ± 0,30	26,75	30	12,40	140-030-020
3,0	3000	29,75 ± 0,30	26,75	30	18,60	140-030-030
4,0	500	39,70 ± 0,10	35,70	40	5,50	140-040-005
4,0	1000	39,70 ± 0,20	35,70	40	11,00	140-040-010
4,0	2000	39,70 ± 0,30	35,70	40	22,00	140-040-020
4,0	3000	39,70 ± 0,30	35,70	40	33,00	140-040-030
5,0	500	49,70 ± 0,10	44,70	50	8,60	140-050-005
5,0	1000	49,70 ± 0,20	44,70	50	17,20	140-050-010
5,0	2000	49,70 ± 0,30	44,70	50	34,40	140-050-020
5,0	3 000	49,70 ± 0,30	44,70	50	51,60	140-050-030

© Aandrijvingen Gallon NV 100510

tandlatten
crémaillères

staal / acier: **1.0503 (C45) - 650 N/mm²**


vertandingskwaliteit / qualité denture **9**

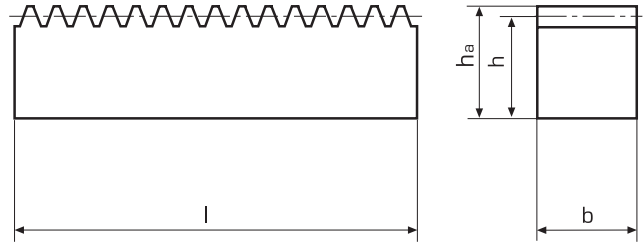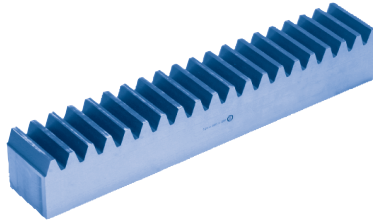

module	l	h _a	h	b h 11	Kg	code
6,0	500	59,65 ± 0,10	53,65	60	12,30	140-060-005
6,0	1000	59,65 ± 0,20	53,65	60	24,50	140-060-010
6,0	2000	59,65 ± 0,30	53,65	60	49,00	140-060-020
6,0	3000	59,65 ± 0,30	53,65	60	73,50	140-060-030
8,0	500	79,60 ± 0,10	71,60	80	21,40	140-080-005
8,0	1000	79,60 ± 0,10	53,65	80	42,70	140-080-010
8,0	2000	79,60 ± 0,10	53,65	80	85,40	140-080-020

ingrijphoek / angle d'attaque: 20°

© Aandrijvingen Gallon NV 100510



montagestuk / pièce de montage - staal / acier 1.0503 (C45)

module	l	h _a	h	b h 11	code
1,0	200	9,80	8,80	10	140-010-001
1,5	200	14,80	13,30	15	140-015-001
2,0	200	19,75	17,75	20	140-020-001
2,5	200	24,75	22,25	25	140-025-001
3,0	200	29,75	26,75	30	140-030-001
4,0	200	39,70	35,70	40	140-040-001
5,0	200	49,70	44,70	50	140-050-001
6,0	200	59,65	53,65	60	140-060-001
8,0	200	79,60	71,60	80	140-080-001

ingrijphoek / angle d'attaque: 20°