


tandlatten voor doorlopende montage - commercieel gamma
crémaillères pour montage continu - gamme commerciale
 staal / acier: **C43**

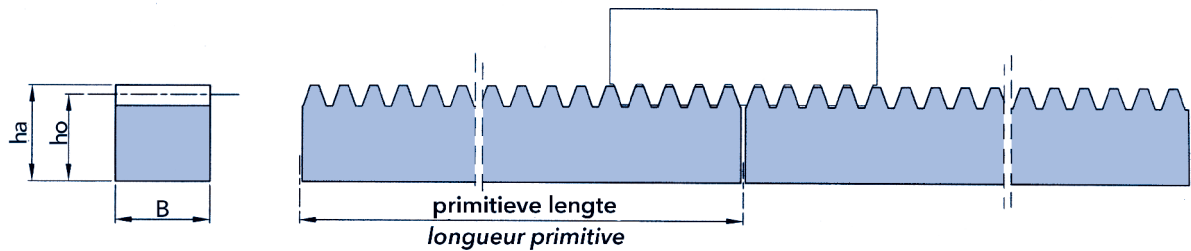

module	l	primitieve lengte longueur primitive	Z*	B x ha	ho	kg.	code
1,0	500	499,51	159	15 x 15	14,00	0,80	XKW-M1,0-0500
1,0	1000	1002,17	319	15 x 15	14,00	1,60	XKW-M1,0-1000
1,0	2000	2001,19	637	15 x 15	14,00	3,30	XKW-M1,0-2000
1,5	500	499,51	106	17 x 17	15,50	1,00	XKW-M1,5-0500
1,5	1000	1003,74	213	17 x 17	15,50	2,10	XKW-M1,5-1000
1,5	2000	2002,77	425	17 x 17	15,50	4,10	XKW-M1,5-2000
2,0	500	502,65	80	20 x 20	18,00	1,40	XKW-M2,0-0500
2,0	1000	1005,31	160	20 x 20	18,00	2,80	XKW-M2,0-1000
2,0	2000	2004,34	319	20 x 20	18,00	5,60	XKW-M2,0-2000
2,5	500	502,65	64	25 x 25	22,5	2,20	XKW-M2,5-0500
2,5	1000	1005,31	128	25 x 25	22,5	4,40	XKW-M2,5-1000
2,5	2000	2002,77	255	25 x 25	22,5	8,70	XKW-M2,5-2000
3,0	500	499,51	53	30 x 30	27,00	3,20	XKW-M3,0-0500
3,0	1000	1008,45	107	30 x 30	27,00	6,30	XKW-M3,0-1000
3,0	2000	2007,48	213	30 x 30	27,00	12,60	XKW-M3,0-2000
4,0	500	502,65	40	40 x 40	36,00	5,60	XKW-M4,0-0500
4,0	1000	1005,31	80	40 x 40	36,00	11,20	XKW-M4,0-1000
4,0	2000	2010,62	160	40 x 40	36,00	22,40	XKW-M4,0-2000
5,0	500	502,65	32	50 x 50	45,00	8,70	XKW-M5,0-0500
5,0	1000	1005,31	64	50 x 50	45,00	17,50	XKW-M5,0-1000
5,0	2000	2010,62	128	50 x 50	45,00	35,00	XKW-M5,0-2000
6,0	1000	1017,88	54	60 x 60	54,00	25,20	XKW-M6,0-1000
6,0	2000	2016,90	107	60 x 60	54,00	50,40	XKW-M6,0-2000

ingrijphoek / angle d'attaque: 20°

Z*: aantal tanden / nombre de dents