


conische tandwielen
 pignons coniques
 staal / acier: EN8 (C45)
 1 : 1,5

03

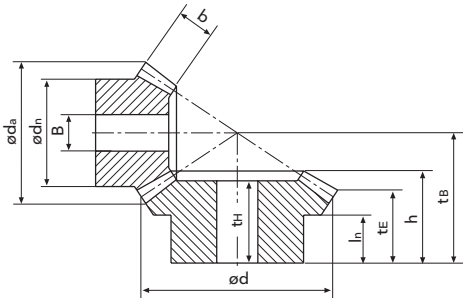

module	Z*	da	d	b	Ln	dn	B	tB	h	tH	tE	Kg	code
1,0	16	17,66	16,0	4,5	7,2	13,5	5,0	20,0	12,2	11,0	8,55	0,011	151-210-016
	24	25,11	24,0	4,5	9,3	21,0	6,0	20,0	15,1	13,5	12,83	0,035	151-210-024
1,5	16	26,49	24,0	7,0	10,6	20,0	8,0	30,0	18,4	17,0	12,83	0,036	151-215-016
	24	37,67	36,0	7,0	12,0	26,0	8,0	27,0	19,7	17,5	16,25	0,080	151-215-024
2,0	16	35,32	32,0	10,0	12,0	26,0	10,0	38,0	23,0	21,0	15,17	0,080	151-220-016
	24	50,22	48,0	10,0	15,0	35,0	12,0	35,0	25,7	23,0	20,66	0,185	151-220-024
2,5	16	44,16	40,0	12,5	13,5	32,0	12,0	46,0	27,3	25,0	17,40	0,146	151-225-016
	24	62,77	60,0	12,5	16,0	42,0	14,0	42,0	30,2	27,0	24,10	0,340	151-225-024
3,0	16	53,00	48,0	14,5	15,5	40,0	14,0	54,0	31,1	28,0	19,66	0,255	151-230-016
	24	75,32	72,0	14,5	18,0	50,0	16,0	49,0	34,6	30,0	27,50	0,555	151-230-024
3,5	16	61,82	56,0	17,0	17,0	47,0	16,0	62,0	35,4	32,0	21,94	0,400	151-235-016
	24	87,88	84,0	17,0	21,0	58,0	18,0	57,0	40,3	36,0	31,91	0,905	151-235-024
4,0	16	70,65	64,0	19,0	18,5	54,0	18,0	70,0	39,2	35,0	24,21	0,584	151-240-016
	24	100,43	96,0	19,0	24,0	66,0	20,0	65,0	45,7	40,0	36,32	1,330	151-240-024
4,5	16	79,48	72,0	21,5	21,0	60,0	20,0	79,0	44,5	40,0	27,50	0,833	151-245-016
	24	113,00	108,0	21,5	26,0	75,0	25,0	73,0	51,5	45,0	40,74	1,880	151-245-024
5,0	16	88,32	80,0	24,0	23,0	65,0	22,0	88,0	49,8	45,0	30,77	1,130	151-250-016
	24	125,54	120,0	24,0	28,0	85,0	30,0	80,0	56,0	49,0	44,16	2,550	151-250-024
6,0	16	105,96	96,0	28,5	24,7	80,0	25,0	102,0	55,9	50,0	33,33	2,050	151-260-016
	24	150,66	144,0	28,5	32,0	105,0	35,0	90,0	61,1	52,5	46,99	4,180	151-260-024

onder hoek van / angle des axes: 90°
 drukhoek / angle d'attaque: 20°
 Z*: aantal tanden / nombre de dents