


tandriemschijven voor klembussen 8M
poulies dentées à moyeu amovible type 8M
8M 30 stap / pas 8 mm
30 mm riembreedte / largeur

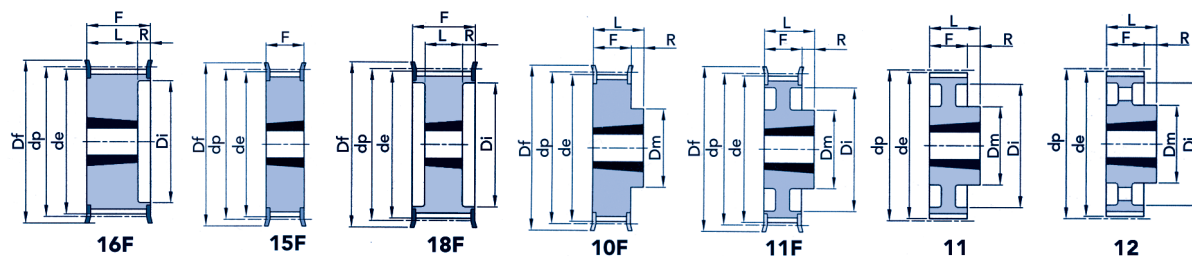

code	type	Z*	klembus moyeu	max. boring alésage max.	dp	de	Df	Dm	Di	F	L	R	flens nr. n° de flasque	Kg
TL 22-8M-30	16F	22	1008	25	56,02	54,65	60	-	37	38	22	16	308	0,33
TL 24-8M-30	16F	24	1108	25	61,11	59,74	66	-	44	38	22	16	310	0,40
TL 26-8M-30	16F	26	1108	25	66,21	64,84	71	-	44	38	22	16	311	0,45
TL 28-8M-30	16F	28	1210	32	71,30	70,08	75	-	50	38	25	13	312	0,50
TL 30-8M-30	15F	30	1615	42	76,39	75,13	83	-	-	38	38	-	314	0,55
TL 32-8M-30	15F	32	1615	42	81,49	80,16	87	-	-	38	38	-	315	0,60
TL 34-8M-30	15F	34	1615	42	86,58	85,21	91	-	-	38	38	-	316	0,80
TL 36-8M-30	15F	36	1615	42	91,67	90,30	98	-	-	38	38	-	319	1,00
TL 38-8M-30	15F	38	1615	42	96,77	95,39	103	-	-	38	38	-	320	1,10
TL 40-8M-30	15F	40	1615	42	101,86	100,49	106	-	-	38	38	-	321	1,34
TL 44-8M-30	18F	44	2012	50	112,05	110,67	119	-	86	38	32	3	325	1,30
TL 48-8M-30	18F	48	2012	50	122,23	120,86	127	-	90	38	32	3	327	1,80
TL 56-8M-30	18F	56	2012	50	142,60	141,23	148	-	110	38	32	3	333	3,80
TL 64-8M-30	10F	64	2517	60	162,97	161,60	168	125	-	38	45	7	338	4,30
TL 72-8M-30	11F	72	2517	60	183,35	181,97	192	125	158	38	45	7	340	4,40

materiaal: staal / matériau: acier

TL 80-8M-30	11	80	2517	60	203,72	202,35	-	125	180	38	45	7	-	4,65
TL 90-8M-30	11	90	2517	60	229,18	227,81	-	125	204	38	45	7	-	5,80
TL112-8M-30	12	112	2517	60	285,21	283,83	-	125	254	38	45	7	-	6,20
TL144-8M-30	12	144	2517	60	366,69	365,32	-	125	336	38	45	7	-	9,00

materiaal: gietijzer / matériau: fonte

Z*: aantal tanden / nombre de dents